

## PROPERTIES AND APPLICATIONS

The metal eyeleted flat gaskets offer special protection against blowout for the sealing of critical or dangerous media. The sealing insert is usually made from TESNIT BA or Grafilit gasket material. The standard metal jacket is formed with an austenitic stainless steel leaf with a thickness 0.15 mm - 0.2 mm U-shaped and pressed in such a way that it becomes a single body with a base seal. The good malleability grade of the austenitic stainless steel gives the covering excellent mechanical properties and good resistance to erosion, while the well-known resistance to heat and corrosion ensures a long working life for the seal.



## ADVANTAGES

- Blow out protection.
- Protection against chemical attack.
- Improved sealability due to the local higher stress under eyelet.

## SHAPE AND CONSTRUCTION

Gaskets are available according to EN 1514-1, ASME B16.21 and other Standard Forms. Custom made gaskets are available upon request.

## SIZE

The only limitation of the eyeleted gasket is the size of the basic gasket material.

Size limitations:


From 20 mm to 400 mm one piece eyelet.

From 400 mm upwards plasma welded eyelet.

The standard production follows the sizes and norms by ASME B16.21 and EN 1514-1.

## GASKET ORDERING EXAMPLE

EN 1514-1, DN65 / PN 16, Form IBC,  
material: TESNIT BA-U, 2 mm, eyelet AISI 316

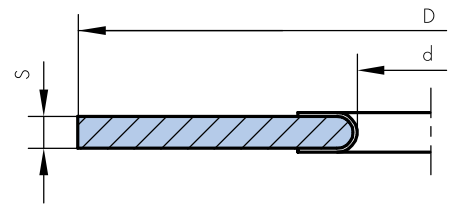

MP1

